



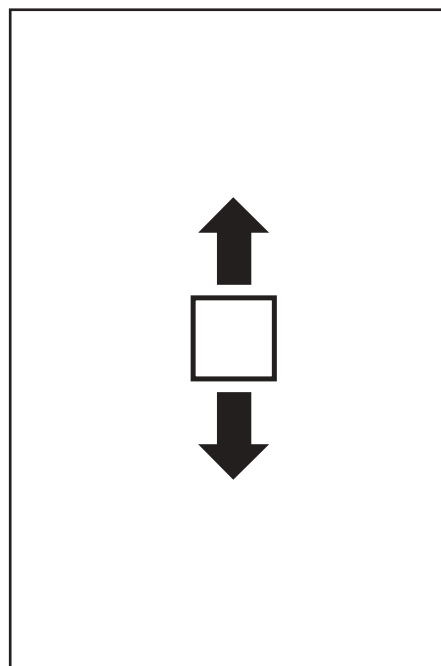

MODEL 530

20t ... 25t

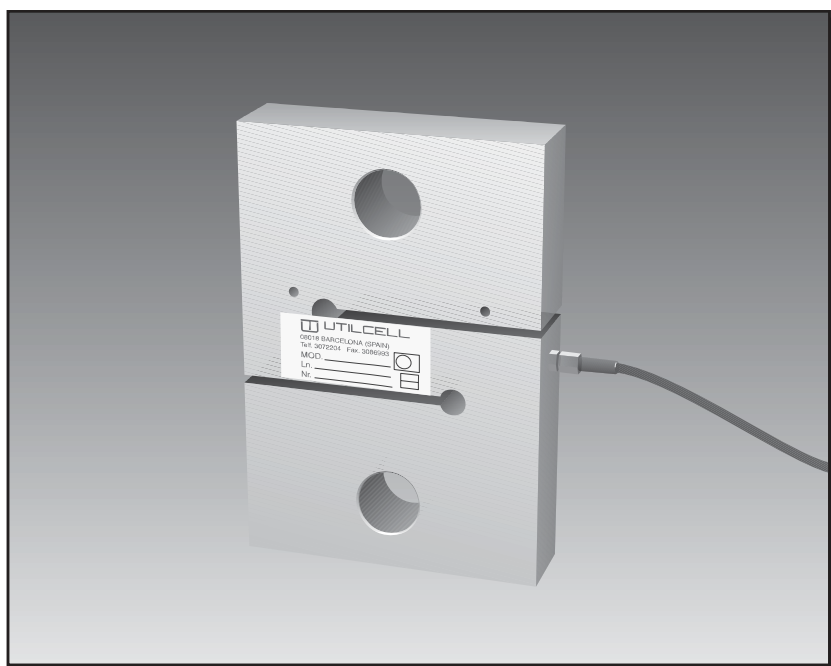

- Tension load cell
- Measuring element from steel alloy
- 2000 divisions O.I.M.L. R60 class C
- Protected IP 66 (EN 60529)
- Protected against corrosion by nickel-plated treatment
- 6 wire (sense) electrical connection
- Wägezelle für Zugkraft
- Messkörper aus Stahl
- 2000d nach OIML R60
- Schutzart IP 66 (EN 60529)
- Korrosionsschutz durch Vernickelung
- 6-Leiter-Anschluss (Sense)

Model Modell	Nominal capacity Nennlast Ln	Accuracy class Genauigkeitsklasse n. OIML	Minimum division Kleinster Teilungswert vmin	Service load Gebrauchslast 150 % Ln	Safe load Grenzlast 200 % Ln
530 20 t	20 t	2000	5 kg	30 t	40 t
530 25 t	25 t	2000	6.25 kg	37.5 t	50 t

1t = 1000 kg

PE.SA. SERVICE S.R.L. via Pietro Nenni 39 66020 Sambuceto (CH)
Email info@pesaservice.it

